


Garware Colour PPF: Technical Data Sheet (Dev)

Garware Colour PPF is manufactured by unique long lasting specialised colour technology with self-healing coating for scratch resistance and easy cleaning. This film is designed for automotive painted vehicle surfaces to give best aesthetic looks as per choice.

Product Construction:

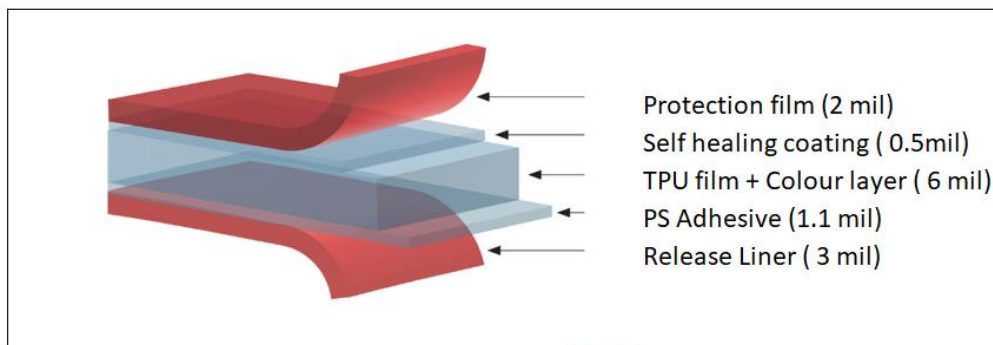

Nominal Thickness (TPU+ PSA+ SH Coating): $190 \pm 10\%$

Key Features:

- ✓ Excellent Film Gloss
- ✓ Excellent anti scratch property
- ✓ Good chemical resistance
- ✓ Good stain resistance

Application Conditions:

Recommended vehicles surface and ambient air temperature should be between 20°C to 30°C. Application should be done in a dust free area and away from direct sunlight.

Storage Condition:

Recommended to store Rolls in its original packaging with temperature ranging from 18 to 26 °C, Relative Humidity 50 to 60 %.

Colour varieties:

Colour PPF available in many colours like Black, White, Red, Blue etc.
For latest updates refer swatch book, website.

Performance Properties:

Sr. No.	Properties	Testing Standards	Measurement Unit	Typical Values
Mechanical Properties				
1	Peel strength: 20 min @24°C	FTM 01	kg/in	> 0.8 kg/ inch
2	Peel strength: 72 Hrs @24°C	FTM 01	kg/in	> 1.2 kg/ inch
3	Gloss at 60°	ASTM D-2457	GU	> 85
4	Tensile Strength	ASTM D-882	Mpa	>15
5	Elongation at break	ASTM D-882	%	>200
Aging Performance				
6	Heat ageing 80° C/ 24 Hrs	Internal	-	Pass- No Detrimental Effect
7	Water immersion 40°C/ 24 Hrs	Internal	-	Pass- No Detrimental Effect
Stain Resistance				
8	Water and soap resistance Drop test for 10 min	Internal	-	Pass- No Detrimental Effect
9	Battery acid Drop test for 10 min	Internal	-	Pass- No Detrimental Effect
10	Diesel Drop test for 10 min	Internal	-	Pass- No Detrimental Effect
11	SAE Motor oil Drop test for 10 min	Internal	-	Pass- No Detrimental Effect
12	Hydraulic oil Drop test for 10 min	Internal	-	Pass- No Detrimental Effect

Application Conditions:

Recommended vehicles surface and ambient air temperature should be between 20°C to 30°C. Application should be done in a dust free area and away from direct sunlight.

Storage Condition:

The Shelf life of this film is 1 year when stored in its original packaging at the temperature ranging from 18 to 26 ° C and Relative Humidity 50 to 60 %.

Notes:

The values listed herein are typical values. They are intended only as a source of information. Prior to application, the user must determine the suitability of the product for its intended use and assumes all risk and liability. Refer PPF application manual for more details.
Refer PPF application manual for more details.